


OR-V70S is especially suitable for ceramic tile, marble, epoxy resin, cement and other large area cleaning, such as factories, square, supermarket, government, hospital, school, hotel, airport, subway, terminals and other places.

本款驾驶式洗地机能满足大部分工商业地面的清洗需求如工厂、广场、超市、政府、医院、学校、酒店、机场、地铁、航站楼等场所。





	Item 项目名称	Specification 参数
	Working Width 清洁宽度	560mm
	Squeegee Width 扒头宽度	850mm
	Working Speed 工作速度	6.5km/h
	Cleaning Efficiency 工作效率	3600m ² /h
	Brush Pressure 刷盘压力	40kg
	Brush RPM 刷盘转速	155rpm
	Brush Motor 刷盘马达	24V/500W
	Suction Motor 吸水马达	24V/500W
	Drive Motor 驱动电机	24V/500W
	Max Gradient 爬坡度	18%
	Solution Tank 清水箱	85L
	Recovery Tank 污水箱	95L
	Batteries 电瓶	12V*2
	Batteries Weight 电瓶重量	35kg*2
	Net Weight 设备净重	155kg
	Dimensions (L*W*H) 设备尺寸 (长*宽*高)	1350*620*1080mm

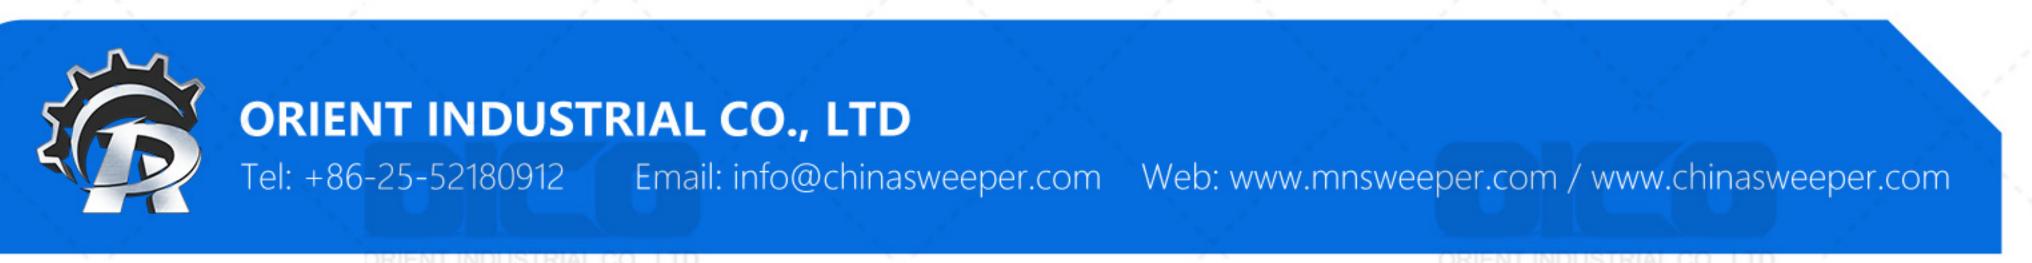



OR-V70S mini driving type scrubber machine set up as one of scrubbing and sucking dry machine, fast cleaning the ground. It can cover the cost within two months, cleaning easier, improve the corporate image.

本款驾驶式洗地机集洗刷、吸干为一体。产品体积小,外型美观,转弯半径小,操作简单,维护方便,使用后地面干爽、无水迹,清洁效果好。静音设计,适合对工作噪音要求严格的场所使用。











• Simple Operation Panel 操作面板简单易懂

The operation panel is easy to understand and can be operated without special training. 操作面板上直观地按钮,去掉繁琐的步骤,操作简单,无需特别的培训学习即可操作。

• Mechanized Operation 机械化操作

Automatic adjustment of lifting of brush handle, mechanized operation, low failure rate. 刷盘的升降采用机械化操作,操作简单方便,故障率低。

Water Volume Control Switch 智能水量控制系统

Equipped with high-quality manual ball valves and solenoid valves, the water volume is adjustable to suit different application environments.

采用智能水量控制系统,可以保护电机不受损害。配置电动控水系统,可以节省用水量和清洁剂。

· Water Level Induction System 水满自动停机

Sewage tank with water level induction system, when the tank is full it will automatic shut down to avoid burning out the

污水箱具有水位感应系统,水满自动停机,以保护电机不受损害,延长电机使用寿命。

Aluminum Cast Squeegee 铝铸吸水扒

One-piece aluminum cast squeegee wear-resistant and impact-resistant, curved design, can be rotated by 180°. 一体成型耐磨抗撞击,弧形设计,可以180°旋转吸污。













